


Standby power : 625KVA/500KW
Prime power : 568KVA/455KW
Standard features

- Engine : CUMMINS , KTAA19-G7
- Charge alternator : 24V
- Governor : Electrical
- Generator : LEROYSOMER , LSA47.2 L9
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- User's manual


Weight and Dimensions

GEN-SET-	Dimensions (L X W X H)	Weight
Open type	3930mm X 1670mm X 1980mm	5973Kg
Silent type	6000mm x 2440mm x 2590mm	11473Kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	902	625/500	568/455

Engine Data

Manufacturer/Model	CUMMINS KTAA19-G7 4-cycle
Cylinder /Arrangement	6 / L
Displacement	18.9 L
Bore and Stroke	159 mm X 159mm
Compression ratio	13.5 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	555KW
Frequency regulation , steady state	≤ 1%
Governor : type	Electrical

Exhaust System

Exhaust gas flow	1855L/S
Exhaust temperature	450°C
Max back pressure	10KPa

ULTIMATE POWER SOLUTION FZC
<http://www.upsgenerator.com>

**Fuel System**

Fuel consumption 100% (of the Prime Power)	113 L / h
--	-----------

Oil system

Total oil capacity w/filters	50L
------------------------------	-----

Air intake

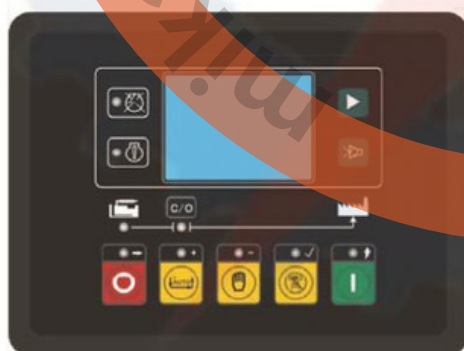
Engine air flow	692L/s
-----------------	--------

Coolant System

Radiator & engine capacity	145L
Max water temperature	104°C
Thermostat	82-93°C

Generator Data

Manufacturer / Type	LEROYSOMER / LSA47.2 L9
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	Brushless SHUNT
Insulation : class , temperature rise	H / H
protection	IP23

Control panel**Specifications :**

Frequency meter , Ammeter , Voltmeter , Alarms and faults
Oil pressure , water temperature , No start-up , Overspeed ,
Min/max battery voltage , Low fuel level , Emergency stop

Engine parameters:

Hours counter , Oil pressure , water temperature