

2058 KVA 3 PHASE 50



2206 KVA 50Hz 3 PHASE

GENERATING SET MODEL UPS D 725

Output Ratings

	Prime	Standby
380-415 V, 3 ph, 50 Hz, 1500 rpm	2058 KVA 1646 KW	2206 KVA 1765 KW
380-415 V, 3 ph, 60 Hz, 1800 rpm	-	-

ENGINE/ TECHNICAL DATA

Ratings at 0.8 Power Factor

Engine Make	Perkins
Engine Model	4016TAG2A
Governing Type	Electronic
Number of Cylinders	16
Cylinder Arrangement	Vertical in line
Bore and Stroke mm	160 X 190
Displacement/ Cubic Capacity litres	61.123
Induction System	Turbocharged, air to air aftercooled
Cycle	4 stroke
Combustion System	Direct Injection
Compression Ratio	13.6:1
Frequency and Engine Speed	50Hz & 1500rpm
Gross Engine Power kW(hp)	1766
Fuel Consumption @50% load L/hr	212
@75% load L/hr	326
@100% load L/hr	-
Total Lubrication System Capacity litres	147
Total Coolant Capacity (inc. radiator) litres	316
Exhaust Temperature: °C	460

ALTERNATOR DATA

Make	UPS
Model	UPS2000
No. of Bearings	1
Insulation class	H
Wires	6/12
Ingress Protection	IP23
Excitation System	Shunt
Winding Pitch	2/3

Overspeed	2250 mn-1
Voltage Regulation (Standby)	±1%

CONTROL PANEL

Make	DeepSea
Model	7100 Series

The **DSE 7100 series** is an Auto Start Control Module for single genset applications. It includes a backlit LCD display which clearly shows the status of the engine all the times. This module can either be programmed using the front panel or by using the DSE configuration suite PC software. **Metering and Alarm Indications:**

- Generator frequency
- Underspeed, Overspeed
- Generator volts (L-L-L-N)
- Generator current
- Engine oil pressure
- Engine coolant temperature
- Hours run counter
- Battery volts
- Fail to start/stop
- Emergency stop
- Failed to reach loading voltage/frequency
- Charge fail
- Low DC Voltage
- CAN diagnostics and CAN fail/error

Image is for illustrative purpose only



STANDARD SPECIFICATIONS

2058 KVA
3 PHASE 50Hz

1. ENGINE

Perkins four stroke heavy duty high performance industrial type diesel engine.

2. ENGINE FILTRATION SYSTEM

- Cartridge type dry air filter.
 - Two cartridge type fuel filter.
 - Full flow lube oil filter.
- All filters have replaceable elements.

3. COOLING RADIATOR

Radiator and cooling fan, complete with safety guards designed to cool the engine at high ambient temperatures (consult your dealer for de-ration factors)

4. EXHAUST SYSTEM

Exhaust gas flow 31..3 (m3/min)
Maximum allowable back pressure 18.0 (kPa)

5. CIRCUIT BREAKER TYPE

3 pole MCCB. (4 pole is optional)

6. FUEL SYSTEM

The baseframe design is incorporated with an integral fuel tank with a capacity of approx.. 8 hours running at Full load. The tank is supplied complete with fill cap breather, fuel feed and return lines to the Engine and the drain plug.

7. ALTERNATOR

7.1 INSULATION SYSTEM

- The insulation system is Class H.
- All windings are impregnated in either a triple dip thermoset-Ting liquid, oil and acid resisting polyester varnish or vacuum pressure impregnated with a special polyester resin.
- Heavy coat of antitracking varnish additional protection Against moisture or condensation.

7.2 AUTOMATIC VOLTAGE REGULATOR (AVR)

The fully sealed Automatic Voltage Regulator maintains

The Voltage Regulation at $\pm 1\%$. Nominal adjustment by means of a trim pot incorporated on the AVR.

8. MOUNTING ARRANGEMENT

8.1 COUPLING The Engine and Alternator are directly coupled by means of an SAE flange. The Engine flywheel is flexibly coupled to the Alternator rotor.

8.2 ANTI-VIBRATION MOUNTING PADS

Anti-Vibration pads are affixed between Engine/Alternator feet and the Baseframe thus ensuring complete vibration isolation of the rotating assembly.

8.3 SAFETY GUARDS

The Fan & Fan Drive along with the battery Charging Alternator are Safety Guard protected for personnel protection.

2206 KVA
3 PHASE

50Hz

9. FACTORY TEST

- The Generating set is load tested before
- dispatch All protective devise control functions and site load conditions are simulated. The generator and its systems are checked before dispatch.

10. EQUIPMENT FINISHING

All mild steel components are fully degreased and painted with powder coated paint to ensure maximum scuff resistance and durability.

11. DOCUMENTATION

Operation & Maintenance manual, Circuit wiring diagrams and Commissioning/ Fault Finding instruction leaflets are accompanied with the Generator.

12. QUALITY STANDARDS


The equipment meets the following standards, BS4999, BS5000, BS5514 IEC 60034, VDE0530, NEMA MG 1.22 and ISO 8528.

13. WARRANTY

All of the Generating sets are covered under a warranty policy For a period of 12 months or 1000 working hours. Warranty of the equipment is in line with manufacturers warranty terms & conditions. (check warranty statement for more details, as it may vary for different countries.)
In line with the continuous product development, we reserve The right to change specifications without notice.

STANDARD GENERATOR DIMENSION AND WEIGHT

Containerized Type with Silentproof Canopy

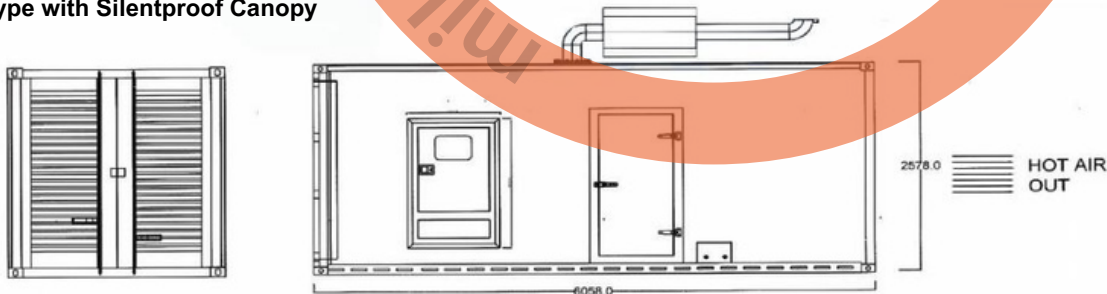

Open Type (without Soundproof Canopy)

